

## Ribbon Microphone Transformer LL2913

LL2913 is identical to our ribbon microphone transformer LL2911, but (for manufacturing reasons) with a different pinout / winding phase.


Turns ratio:

1 + 1 + 1 + 1 : 37

Dims: (Length x Width x Height above PCB (mm))

30 x 22.5 x 14.5

Pin Layout (viewed from component side) and winding schematic:

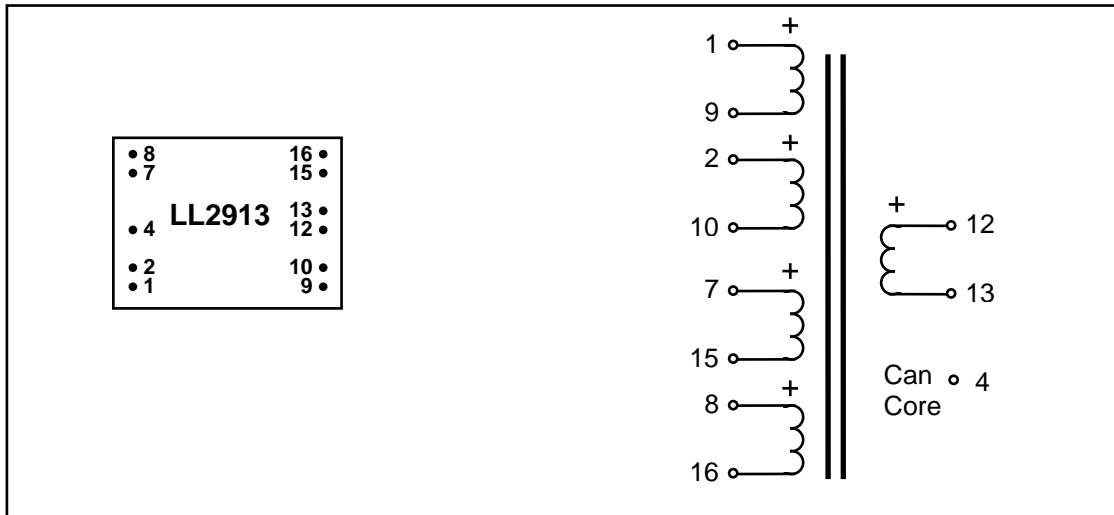

Spacing between pins:

2.54 mm (0.1")

Spacing between rows of pins:

22.86 mm (0.9")

Weight:

27 g

Rec. PCB hole diameter:

1.5 mm

Housing:

Mu metal

Core:

Amorphous strip core

Static resistance of each primary (average):

0.2 Ω

Static resistance of secondary:

59 Ω

