

## Ribbon Microphone Transformer LL2914

LL2914 is a mu metal core version of our amorphous core ribbon microphone transformers LL2913.

(LL2913 is identical to our well known ribbon microphone transformer LL2911, but [for manufacturing reasons] with a different pinout / winding phase.)


**Turns ratio:**

1 + 1 + 1 + 1 : 37

**Dims: (Length x Width x Height above PCB (mm))**

38 x 24 x 17

**Pin Layout** (viewed from component side) **and winding schematic:**

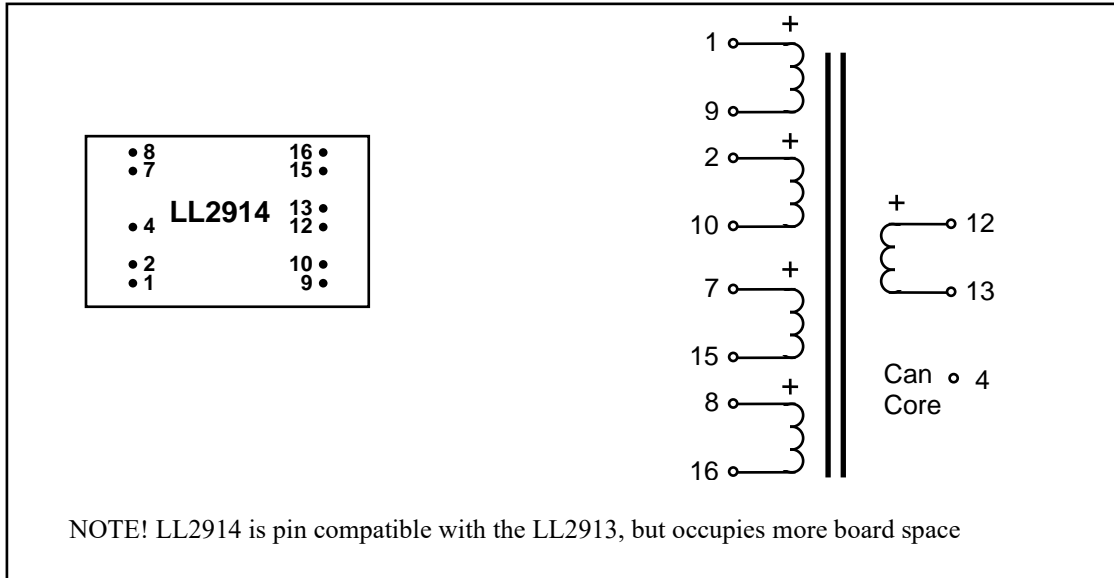

**Spacing between pins:**

2.54 mm (0.1")

**Spacing between rows of pins:**

22.86 mm (0.9")

**Weight:**

45 g

**Rec. PCB hole diameter:**

1.5 mm

**Housing:**

Mu metal

**Core:**

Mu metal laminations

**Static resistance of each primary (average):**

0.2 Ω

**Static resistance of secondary:**

68 Ω

